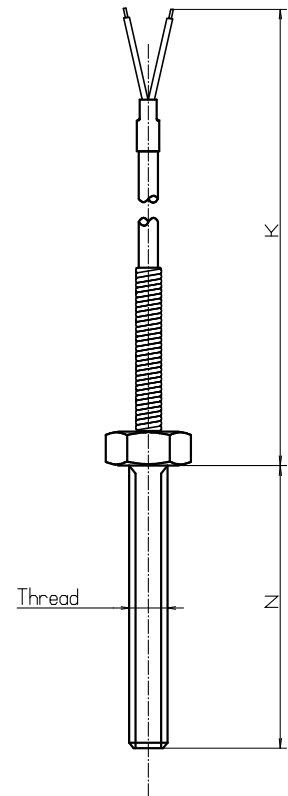


Small threaded element 6-head screws DIN 933

Thermocouple	1 x Fe-CuNi / 2 x Fe-CuNi other item types possible
Operating temperature	400°C at the tip 280°C in the cable exit / cable other temperature range possible in special design
Thermowell	6-head screw according to DIN 933 V4A-Material, M-No. 1.4571
Connection	Teflon insulated flexible cable with stainless steel braided outside


Version with closed probe tip

N in mm	Thread	with closed probe tip			
		Order no. 1 x Fe-CuNi	Order no. 2 x Fe-CuNi	Order no. 1 x NiCr-Ni -	Order no. 2 x NiCr-Ni
30	M 5	1.38.04.11	1.38.04.12	2.38.04.11	2.38.04.12
50	M 5	1.38.04.21	1.38.04.22	2.38.04.21	2.38.04.22
30	M 6	1.38.04.31	1.38.04.32	2.38.04.31	2.38.04.32
50	M 6	1.38.04.41	1.38.04.42	2.38.04.41	2.38.04.42
30	M 8	1.38.04.51	1.38.04.52	2.38.04.51	2.38.04.52
50	M 8	1.38.04.61	1.38.04.62	2.38.04.61	2.38.04.62
30	M10	1.38.04.71	1.38.04.72	2.38.04.71	2.38.04.72
50	M10	1.38.04.81	1.38.04.82	2.38.04.81	2.38.04.82
100	M10	1.38.04.91	1.38.04.92	2.38.04.91	2.38.04.92
Addition					
1 m Cable length		1.38.00.10		2.38.00.10	

Version with open probe tip

N in mm	Thread	with open probe tip			
		Order no. 1 x Fe-CuNi	Order no. 2 x Fe-CuNi	Order no. 1 x NiCr-Ni -	Order no. 2 x NiCr-Ni
30	M 5	1.72.04.11	1.72.04.12	2.72.04.11	2.72.04.12
50	M 5	1.72.04.21	1.72.04.22	2.72.04.21	2.72.04.22
30	M 6	1.72.04.31	1.72.04.32	2.72.04.31	2.72.04.32
50	M 6	1.72.04.41	1.72.04.42	2.72.04.41	2.72.04.42
30	M 8	1.72.04.51	1.72.04.52	2.72.04.51	2.72.04.52
50	M 8	1.72.04.61	1.72.04.62	2.72.04.61	2.72.04.62
30	M10	1.72.04.71	1.72.04.72	2.72.04.71	2.72.04.72
50	M10	1.72.04.81	1.72.04.82	2.72.04.81	2.72.04.82
100	M10	1.72.04.91	1.72.04.92	2.72.04.91	2.72.04.92
Addition					
1 m Cable length		1.72.00.10		2.72.04.10	

Versions in other threads / nominal lengths possible