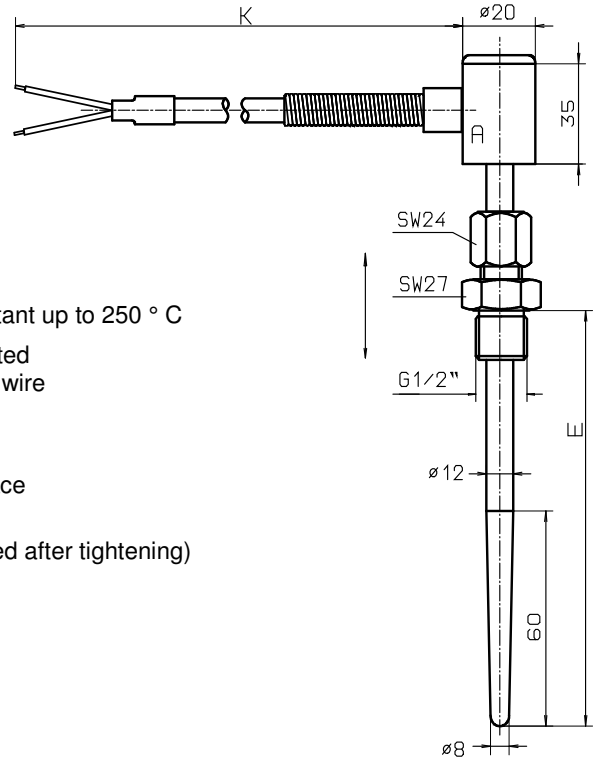


Thermocouple for engines

- Thermocouple** Fe-CuNi / Ni-CrNi
 other item types possible
- Thermowell** Heat resistant steel W-Nr. 1.4828
- Operating temperature** At the tip max.:
 for Fe-CuNi 800° C
 for Ni-CrNi 1000° C
- Connection** fixed cemented cable temperature resistant up to 250 ° C
 Single core and common silicone insulated
 External reinforcement galvanized steel wire
 max. Temperature 200 ° C
 Cable length 1 m
- Fitting** Wedge ring coupling steel finished surface
 Wedge ring made of stainless steel
 (Wedge ring coupling can not be adjusted after tightening)


Version Angled cable outlet

E in mm	Order no. 1 x Fe-CuNi	Order no. 2 x Fe-CuNi	Order no. 1 x NiCr-Ni -	Order no. 2 x NiCr-Ni
100	1.81.10.11	1.81.10.12	2.81.10.11	2.81.10.12
150	1.81.10.21	1.81.10.22	2.81.10.21	2.81.10.22
200	1.81.10.31	1.81.10.32	2.81.10.31	2.81.10.32
250	1.81.10.41	1.81.10.42	2.81.10.41	2.81.10.42
Addition 1 m Cable length	1.81.00.10	1.81.00.20	2.81.00.10	2.81.00.20

Version Straight cable outlet

E in mm	Order no. 1 x Fe-CuNi	Order no. 2 x Fe-CuNi	Order no. 1 x NiCr-Ni	Order no. 2 x NiCr-Ni
100	1.81.10.51	1.81.10.52	2.81.10.51	2.81.10.52
150	1.81.10.61	1.81.10.62	2.81.10.61	2.81.10.62
200	1.81.10.71	1.81.10.72	2.81.10.71	2.81.10.72
250	1.81.10.81	1.81.10.82	2.81.10.81	2.81.10.82
Addition 1 m Cable length	1.81.00.10	1.81.00.20	2.81.00.10	2.81.00.20

Versions available in other nominal lengths

