

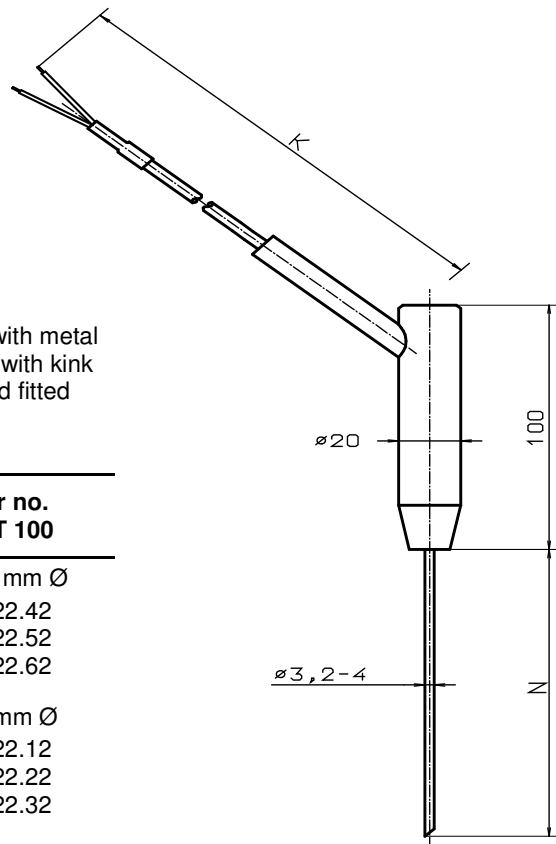


Cut-in measuring thermometer with side cable outlet

Measuring insert	1 x PT 100 / 2 x PT 100 DIN 43760
Operating temperature	Up to 250°C
Thermowell	Tip with pipe V4A-Material Material 1.4571 Tip 3-4-4,5 mm Ø
Handhold	Teflon 20 mm Ø
Connection	Waterproof sintered Teflon insulated cable with metal shield and outer jacket Teflon. Cable outlet with kink protection Stripped terminal ends 50 mm and fitted with ferrules, cable length 2 m.



Version

Shape of the tip	N in mm	Order no. 1 x PT100	Order no. 2 x PT 100
 A A A	100	Tip 3 mm Ø 4.44.22.11	Tip 4,5 mm Ø 4.44.22.42
	150	4.44.22.21	4.44.22.52
	200	4.44.22.31	4.44.22.62
 B B B	100	Tip 4 mm Ø 4.44.22.41	Tip 4 mm Ø 4.44.22.12
	150	4.44.22.51	4.44.22.22
	200	4.44.22.61	4.44.22.32
Add. Price per 1m cable length		4.44.00.10	4.44.00.20


Cut-in resistance thermometer / Supply cable stainless steel corrugated hose

Measuring insert	1 x PT 100 / 2 x PT 100 DIN 43760
Operating temperature	Up to 250°C
Thermowell	Tip with pipe V4A-Material Substance 1.4571 Tip 3-4-4,5 mm Ø
Handhold	Teflon 20 mm Ø
Connection	Waterproof sintered Teflon insulated cable with metal shield and outer jacket Teflon. Cable outlet with kink protection Stripped terminal ends 50 mm and fitted with ferrules, VA-corrugated hose, cable length 2 m.

Version

Shape of the tip	N in mm	Order no. 1 x PT100	Order no. 2 x PT 100
 A A A	100	Tip 3 mm Ø 4.44.23.11	Tip 4 mm Ø 4.44.23.12
	150	4.44.23.21	4.44.23.22
	200	4.44.23.31	4.44.23.32
 B B B	100	Tip 4 mm Ø 4.44.23.41	Tip 4,5 mm Ø 4.44.23.42
	150	4.44.23.51	4.44.23.52
	200	4.44.23.61	4.44.23.62
1 m cable length		4.44.00.10	4.44.00.20
1 m Hose length (incl. cable)		4.44.10.10	4.44.20.20

